

# Almost Optimal Distributed Algorithms for Large-Scale Graph Problems

Gopal Pandurangan\*

Peter Robinson†

Michele Scquizzato\*

## Abstract

We present (almost) optimal distributed algorithms for fundamental graph problems in the  $k$ -machine (a.k.a. Big Data) model of distributed computation introduced in [Klauck et al., SODA 2015]. Our main result is an optimal algorithm for graph connectivity which solves an important open problem posed in that paper. Our algorithm runs in  $\tilde{O}(n/k^2)$  rounds ( $\tilde{O}$  notation hides a  $\text{polylog}(n)$  factor and an additive  $\text{polylog}(n)$  term), where  $n$  is the number of nodes of the input graph and  $k$  is the number of available machines. This improves over the previous best bound of  $\tilde{O}(n/k)$ , and is optimal (up to a polylogarithmic factor) in view of the existing lower bound of  $\tilde{\Omega}(n/k^2)$ .

Our improved algorithm uses a bunch of different techniques that prove useful in the design of efficient distributed graph algorithms. These are *randomized proxy computation* (to load-balance communication among machines), *distributed random ranking* (to produce low-diameter trees), and *linear graph sketching* (to sample inter-component edges fast). In particular, to the best of our knowledge, we make the first application of the linear graph sketching technique in distributed computing. We then present fast algorithms for computing minimum spanning trees, (approximate) min-cuts, and for many graph verification problems; these rely on the above techniques and on the fast connectivity algorithm. All these algorithms take  $\tilde{O}(n/k^2)$  rounds and are (almost) optimal.

---

\*Department of Computer Science, University of Houston, Houston, TX 77204, USA. E-mail: gopalpandurangan@gmail.com, michele@cs.uh.edu. Supported, in part, by US-Israel Binational Science Foundation grant 2008348.

†Department of Computer Science, National University of Singapore, Singapore 117417. E-mail: robinson@comp.nus.edu.sg. Supported by the grant “Fault-tolerant Communication Complexity in Wireless Networks” from the Singapore MoE AcRF-2.

# 1 Introduction

Motivated by the increasing need for fast distributed processing of large-scale graphs, the recent work of Klauck et al. [16] studies a number of fundamental graph problems in a message-passing model for distributed computing called the *k-machine* (a.k.a. *Big Data*) model. The *k-machine* model was motivated by recently developed distributed graph processing systems such as Pregel [25] and Giraph [32] which are based on the message-passing paradigm of distributed computing. In this model, the input graph—which is simply too large to fit into a single machine—is distributed across a group of  $k \geq 2$  machines that are pairwise interconnected via a communication network (i.e., the system is a *k-clique*). The  $k$  machines jointly perform computations on an arbitrary  $n$ -vertex (typically,  $n \gg k$ ) input graph. The input graph is assumed to be initially randomly partitioned among the  $k$  machines (a common implementation in many real world graph processing systems [25, 35, 34]). The communication is point-to-point via message passing. Communication across machines is considered as the costly operation, while local computation (i.e., computation within a machine) is considered free. The goal is to minimize the time complexity, i.e., the number of communication *rounds*, given some constraint on the amount of data that each link of the network can deliver in one round, required to solve the problem at hand. (The model is explained in more detail in Section 1.1.) A key goal in this model is to investigate the amount of speed-up possible vis-a-vis the number of machines used: more precisely, if we use  $k$  machines, does the run time scale linearly (or even super-linearly) in  $k$ ? And what are the fundamental time bounds for various graph problems?

The work of [16] presents lower and upper bounds for several fundamental graph problems in the *k-machine* model. In particular, for the graph connectivity problem it shows a lower bound of  $\tilde{\Omega}(n/k^2)$  rounds.<sup>1</sup> It also presents an  $\tilde{O}(n/k)$ -round algorithm for connectivity and spanning tree (ST) verification, by using a *vertex-centric* approach, inspired by the models of Pregel [25] and Giraph [32]. A *vertex-centric* algorithm design assumes that each machine simulates the execution of a distributed algorithm for each of its locally hosted vertices. The communication between vertices is simulated by forwarding messages between the respective host machines. Hence, the algorithm is designed as if it was executed independently by each vertex, and this makes it easy to implement classic distributed algorithms. Recently, several real systems have reported significant speedups by designing algorithm in a *machine-centric* (or *graph-centric*) way. For example, [37] extends the framework of Pregel and Giraph to incorporate machine-centric algorithms; other machine-centric frameworks are presented in [39, 33]. This allows the algorithm designer to take full advantage of the additional locality information that is available to a machine in comparison to a single vertex.

In this work, we study the impact of machine-centric algorithms on the complexity of distributed large-scale graph processing. In particular, we develop a machine-centric  $\tilde{O}(n/k^2)$  round algorithm for distributed graph connectivity, thus achieving a speedup that is quadratic in the number of machines  $k$ , which is optimal up to polylogarithmic (in  $n$ ) factors. This result is important for two reasons. First, it shows that there are non-trivial graph problems for which we can obtain *superlinear* speed-up. To elaborate further on this point, we shall take a closer look at the proof of the lower bound for connectivity shown in [16]. Using communication complexity techniques, that proof shows that any algorithm (including randomized algorithms) for the graph connectivity problem requires exchanging  $\tilde{\Omega}(n)$  bits of information across machines (this is true for any  $k \geq 2$

---

<sup>1</sup>For notational convenience, throughout this paper  $\tilde{O}(f(n))$  denotes  $O(f(n) \text{ polylog } n + \text{polylog } n)$ , and  $\tilde{\Omega}(f(n))$  denotes  $\Omega(f(n) / \text{polylog } n)$ .

machines). Since there are  $k(k-1)/2$  links in a complete network with  $k$  machines, in one single round the network can deliver at most  $\tilde{\Theta}(k^2)$  bits of information, and thus a lower bound of  $\tilde{\Omega}(n/k^2)$  rounds follows. The connectivity algorithm of this paper thus shows that the optimal speed-up factor of  $\Theta(k^2)$  is attainable. Second, it shows that many other important graph problems can be solved in  $\tilde{O}(n/k^2)$  rounds as well. These include computing a spanning tree, minimum spanning tree (MST), approximate min-cut, and many verification problems such as spanning connected subgraph, cycle containment, bipartiteness, etc. It is important to note that there exists a  $\tilde{\Omega}(n/k)$ -round lower bound for computing a spanning tree of a graph [16], which also implies the same lower bound for other fundamental problems such as computing an MST, breadth-first tree (BFS), and shortest paths tree (SPT). However, this lower bound holds under the “vertex-centric requirement” that each vertex (i.e., the machine which hosts the vertex) must know at the end of the computation the status of all of its incident edges (whether they belong to a ST or not) and output their respective status. (This is the output criterion that is usually required in distributed algorithms [24, 30].) The lower bound proof exploits this criterion to show that any algorithm will require some machine receiving  $\Omega(n)$  bits of information, and since any machine has  $k-1$  links, this gives a  $\tilde{\Omega}(n/k)$  lower bound. On the other hand, if we relax the output criterion to require the final status of each edge to be known by *some* machine (different machines might know the status of different edges), then we show that this can be accomplished in  $\tilde{O}(n/k^2)$  rounds using our fast machine-centric connectivity algorithm.

## 1.1 The Model

We now describe our model of distributed computation, called the *k-machine model* (a.k.a. the *Big Data model*), which was first introduced in [16]. We consider a network of  $k > 1$  (distinct) machines  $N = \{M_1, M_2, \dots, M_k\}$  that are pairwise interconnected by bidirectional point-to-point communication links. Each machine executes an instance of a distributed algorithm. The computation advances in synchronous rounds where, in each round, machines can exchange messages over their communication links and perform some local computation. Each link is assumed to have a bandwidth of  $O(\text{polylog}(n))$  bits per round, i.e.,  $O(\text{polylog}(n))$  bits can be transmitted over a link in one round. Machines do not share any memory and have no other means of communication. There is an alternate (but equivalent) way to view this communication restriction: instead of putting a bandwidth restriction on the links, we can put a restriction on the amount of information that each *machine* can communicate (i.e., send/receive) in each round. The results that we obtain in the bandwidth-restricted model will also apply to the latter model [16]. Local computation within a machine is considered to happen instantaneously at zero cost, while the exchange of messages between machines is the costly operation.<sup>2</sup> (However, it ought to be noticed that in all the algorithms of this paper every machine in every round performs a computation bounded by a polynomial in  $n$ .)

Although the *k-machine model* is a fairly general model of computation, we are mostly interested in studying graph problems in it. Specifically, we are given an input graph  $G$  with  $n$  vertices, each associated with a unique integer ID from  $[n]$ , and  $m$  edges. To avoid trivialities, we will assume that  $n \geq k$  (typically,  $n \gg k$ ). Initially, the entire graph  $G$  is not known by any single machine, but rather partitioned among the  $k$  machines in a “*balanced*” fashion, i.e., the nodes and/or edges of

---

<sup>2</sup>This assumption is reasonable in the context of large-scale data, e.g., it has been made in the context of theoretical analysis of MapReduce, see e.g., [22] for a justification. Indeed, typically in practice, even when assuming that links have a bandwidth of order of gigabytes of data per second, the amount of data that has to be communicated can be in order of tera- or peta-bytes which generally dominates the overall computation cost [22].

$G$  must be partitioned approximately evenly among the machines. We assume a *vertex-partition* model, whereby vertices (and their incident edges) are partitioned across machines. Specifically, the type of partition that we will assume throughout is the *random (vertex) partition (RVP)*, i.e., vertices (and their incident edges) of the input graph are assigned randomly to machines. (This is the typical way used by many real systems, such as Pregel [25], to partition the input graph among the machines; it is easy to accomplish, e.g., via hashing.) However, we notice that our upper bounds also hold under the much weaker assumption whereby it is only required that nodes and edges of the input graph are partitioned approximately evenly among the machines; on the other hand, lower bounds under RVP, such as those in [16], clearly apply to worst-case partitions as well.

Formally, in the *random vertex partition* model, each vertex of  $G$  is assigned independently and uniformly at random to one of the  $k$  machines. If a vertex  $v$  is assigned to machine  $M_i$  we say that  $M_i$  is the *home machine* of  $v$  and, by a slight abuse of notation, write  $v \in M_i$ . When a vertex is assigned to a machine, *all its incident edges* are assigned to that machine as well; i.e., the home machine will know the IDs of the neighbors of that vertex as well as the identity of the home machines of the neighboring vertices (and the weights of the corresponding edges in case  $G$  is weighted). Note that an immediate property of the RVP model is that the number of vertices at each machine is *balanced*, i.e., each machine is the home machine of  $\tilde{\Theta}(n/k)$  vertices with high probability; we shall assume this throughout the paper. A convenient way to implement the RVP model is through *hashing*: each vertex (ID) is hashed to one of the  $k$  machines. Hence, if a machine knows a vertex ID, it also knows where it is hashed to.

Eventually, each machine  $M_i$ , for each  $1 \leq i \leq k$ , must set a designated local output variable  $o_i$  (which need not depend on the set of vertices assigned to machine  $M_i$ ), and the *output configuration*  $o = \langle o_1, \dots, o_k \rangle$  must satisfy certain feasibility conditions w.r.t. problem  $\mathcal{P}$ . For example, when considering the minimum spanning tree (MST) problem, each  $o_i$  corresponds to a set of edges and the edges in the union of the sets  $o_i$  must form an MST of the input graph  $G$ . The *time complexity* of an algorithm is the maximum number of rounds until termination, for any input graph  $G$ .

We assume that the machines have access to a source of shared randomness, and that the machines have joint access to a fully independent hash function  $h(i, j)$  which maps vertex IDs  $i$  and round numbers  $j$  to integer numbers in  $[k]$  representing machine IDs.

We conclude this section by providing one general property of the Big Data model that will be a key ingredient for the analysis of our algorithms. Specifically, we show how fast some specific routing can be done in a complete network such as the Big Data model.

**Lemma 1.** *Consider a complete network of  $k$  machines, where each link can carry one message of  $O(\text{polylog } n)$  bits at each round. If each machine is source of  $O(x)$  messages whose destinations are distributed independently and uniformly at random, or each machine is destination of  $O(x)$  messages whose sources are distributed independently and uniformly at random, then all the messages can be routed in  $O((x \log x)/k)$  rounds w.h.p.*

*Proof.* We shall prove the statement for the case in which each machine is source of  $O(x)$  messages. The other case and its analysis is symmetric.

Since destinations of messages are chosen randomly, we choose to route each message to its (random) destination machine through the link that directly connects the source to the destination machine (which always exists because the network is complete). By a classic balls-into-bins result, each of the  $k - 1$  links of each machine is responsible for carrying  $O((x \log x)/k)$  messages w.h.p., and the result follows.  $\square$

## 1.2 Our Contributions and Techniques

The main result of this paper is a randomized Monte Carlo algorithm in the  $k$ -machine model that determines the connected components of an undirected graph  $G$  correctly with high probability and that terminates in  $\tilde{O}(n/k^2)$  rounds with high probability. This improves upon the previous best bound of  $\tilde{O}(n/k)$  [16]. Improving over this bound is non-trivial since various attempts to get a faster connectivity algorithm fail due to the fact that they end up congesting a particular machine too much, i.e., up to  $n$  bits may need to be sent/received by a machine, leading to a  $\tilde{O}(n/k)$  bound (as a machine has only  $k - 1$  links). For example, a simple algorithm for connectivity is simply flooding: each vertex floods the lowest labeled vertex that it has seen so far; at the end each vertex will have the label of the lowest labeled vertex in its component.<sup>3</sup> It can be shown that the above algorithm takes  $\Theta(n/k + D)$  rounds (where  $D$  is the graph diameter) in the  $k$ -machine model by using the Conversion Theorem of [16]. Hence new techniques are needed to break the  $n/k$  round barrier.

Our fast connectivity algorithm uses a variety of different techniques discussed below. These machine-centric techniques and might be of independent interest for other graph problems.

1. *Randomized Proxy Computation.* This new technique is used to load-balance congestion at any given machine by redistributing it evenly across the  $k$  machines. This is achieved, roughly speaking, by re-assigning the executions of individual nodes uniformly at random among the machines. This technique really posits a machine-centric view of graph computations as opposed to the vertex-centric view that was a feature of most of the previous algorithms in previous work [16]. The Conversion Theorem of [16] directly translates algorithms implemented in a vertex-centric message passing model to the  $k$ -machine model and almost all the previous algorithms were derived using this theorem. In contrast, the present paper *does not* use the Conversion Theorem; instead, it gives a direct algorithm for the problem at hand. This algorithm is a machine-centric algorithm because the computation and communication associated with a particular vertex is directly performed by a machine, and this machine may not even be the one that hosts the vertex. It is crucial to distribute the computation *and* communication across machines (in a random fashion) to avoid congestion at any particular machine. In fact, this allows one to move away from the communication pattern imposed by the topology of the input graph (which can cause congestion at a particular machine) to a more balanced communication overall.
2. *Distributed Random Ranking (DRR).* DRR [5] is a simple technique that will be used to build trees of low height in the connectivity algorithm. In our connectivity algorithm (see Section 2), in any phase we do the following: each current component (in the first phase, each vertex is a component by itself) chooses one *outgoing edge* and then components are combined by merging them along outgoing edges. If done naively, this may result in a long chain of merges, resulting in a component tree of high diameter; communication along this tree will then take a long time. To avoid this we resort to DRR, which suitably reduces the number of merges. With DRR, each component chooses a random *rank*, which is simply a random number, say in the interval  $[1, n^3]$ ; a component (say  $C_1$ ) will merge with the component on the other side of its selected outgoing edge (say  $C_2$ ) if and only if the rank of  $C_2$  is larger than that of  $C_1$ . If the rank of  $C_1$  is higher, then  $C_1$  does not merge with  $C_2$  and thus it becomes the root of a DRR tree, which is a tree induced by the components and the set of the outgoing edges that

---

<sup>3</sup>In fact, this algorithm has been implemented in a variant of Giraph, a graph processing system [37].

have been used in the above merging procedure. We will show that the height of a DRR tree is bounded by  $O(\log n)$  with high probability.

3. *Linear Graph Sketching.* Linear graph sketching [1, 2, 26] is crucially helpful in efficiently finding an outgoing edge of a component. A *sketch* for a vertex (or a component) is a short ( $O(\text{polylog } n)$ ) bit vector that efficiently encodes the adjacency list of the vertex. Sampling from this sketch gives a random (outgoing) edge of this vertex (component). A very useful property is the linearity of the sketches: adding the sketches of a set of vertices gives the sketch of the component obtained by combining the vertices; the edges between the vertices (i.e., the intra-component edges) are automatically “cancelled” leaving only a sketch of the outgoing edges. Linear graph sketches were originally used to process dynamic graphs in the (semi-) streaming model [1, 2, 26]. Here, in the distributed setting, we use them to reduce the amount of communication needed to find an outgoing edge; in particular, graph sketches will avoid us from checking whether an edge is an inter-component or an intra-component edge, and this will crucially reduce communication across machines. We note that earlier distributed algorithms such as the classical GHS algorithm [9] for the MST problem would incur too much communication since they involve checking the status of each edge of the graph.

Using the above techniques and the fast connectivity algorithm, in Section 3 we give algorithms for many other important graph problems. In particular, we present an  $\tilde{O}(n/k^2)$  round algorithm for computing an MST (and hence an ST). We also present  $\tilde{O}(n/k^2)$  round algorithms for approximate min-cut, and for many graph verification problems including spanning connected subgraph, bipartiteness, cycle containment, etc. These algorithms are optimal (up to a polylogarithmic factor); in Section 4 we show a lower bound of  $\tilde{\Omega}(n/k^2)$  for many verification problems by using communication complexity techniques (the lower bound of  $\tilde{\Omega}(n/k^2)$  for ST, MST, and minimum cut follows directly from the  $\tilde{\Omega}(n/k^2)$  lower bound for connectivity shown in [16].)

### 1.3 Other Related Work

The  $k$ -machine model is closely related to the standard *CONGEST* model [30], and in particular to the *congested clique* model, which recently has received considerable attention (see, e.g., [23, 21, 20, 7, 28, 15, 4, 31, 11]). The main difference is that while many vertices of the input graph are mapped to the same machine in the  $k$ -machine model (and this is suitable for modeling large-scale graph computation), in the two aforementioned models each vertex corresponds to a dedicated machine (this is not realistic for large-scale graphs). Furthermore, the parameter  $k$  allows one to study how the time scales with the amount of parallelism available. More “local knowledge” is available per vertex (since it can access for free information about other vertices in the same machine) in the  $k$ -machine model compared to the other two models. On the other hand, all vertices assigned to a machine have to communicate through the links incident on this machine, which can limit the bandwidth (unlike the other two models where each vertex has a dedicated processor). These differences manifest in the time complexity. In particular, the fastest known distributed algorithm in the congested clique model for a given problem may not give rise to the fastest algorithm in the  $k$ -machine model. For example, the fastest algorithms for MST in the congested clique model ([23, 31, 11]) require  $\Theta(n^2)$  messages; implementing these algorithms in the  $k$ -machine model requires  $\Theta(n^2/k^2)$  rounds. Conversely, the slower GHS algorithm [9] gives an optimal  $\tilde{O}(n/k)$  bound in the  $k$ -machine model. The recently developed techniques (see, e.g., [6, 29, 38, 8, 7]) used to prove time

lower bounds in the standard *CONGEST* model and in the congested clique model are not directly applicable here.

For more details on the  $k$ -machine model and other recent relevant work in large-scale distributed computation we refer the reader to, e.g., [16, 38, 19, 22, 14].

## 2 The Connectivity Algorithm

In this section we present our main result, a Monte Carlo randomized algorithm for the  $k$ -machine model that determines the connected components of an undirected graph  $G$  correctly with high probability and that terminates in  $\tilde{O}(n/k^2)$  rounds with high probability (cf. Theorem 1). This algorithm is optimal (up to polylog( $n$ )-factors) by virtue of a matching lower bound of  $\tilde{\Omega}(n/k^2)$  rounds, which was shown in [16] by a reduction from the 2-party communication complexity of set disjointness under random input partitions.

Before delving into the details of our algorithm, as a warm-up we briefly discuss simpler, but less efficient, approaches. The easiest way to solve *any* problem in our model is to first collect all available graph data at a single machine and then solve the problem locally. For example, we could first elect a referee among the machines, which requires  $O(1)$  rounds [18], and then instruct every machine to send its local data to the referee machine. Since the referee machine needs to receive  $O(m)$  information in total but has only  $k - 1$  links of bounded bandwidth, this requires  $\Omega(m/k)$  rounds.

A more refined approach to obtain a distributed algorithm for the  $k$ -machine model is to use the Conversion Theorem of [16] that provides a simulation of a congested clique algorithm  $\mathcal{A}$  in  $\tilde{O}(M/k^2 + \Delta'T/k)$  rounds in the  $k$ -machine model, where  $M$  is the message complexity of  $\mathcal{A}$ ,  $T$  is its round complexity, and  $\Delta'$  is an upper bound to the total number of messages sent (or received) by a single node in a single round. (All these parameters refer to the performance of  $\mathcal{A}$  in the congested clique model.) Unfortunately, existing algorithms (e.g., [9, 36]) typically require  $\Delta'$  to scale to the maximum node degree, and thus the converted time complexity bound in the  $k$ -machine model becomes  $\tilde{\Omega}(n/k)$  at best. Therefore, in order to break the  $\tilde{\Omega}(n/k)$  barrier, we must develop new techniques that directly exploit the additional locality available in the  $k$ -machine model.

In the next subsection we give a high level overview of our algorithm, and then formally discuss all the technical details in the subsequent subsections.

### 2.1 Overview of the Algorithm

Our algorithm follows a Boruvka-style strategy [3], that is, it repeatedly merges adjacent *components* (which are connected subgraphs) of the input graph to form larger (connected) components. The output of each phase is a *labeling* of the nodes of  $G$  such that nodes that belong to the same current component have the same label. At the beginning of the first phase, each node is labeled with its own unique ID, forms a distinct component, and is also the *component proxy* of its own component. Note that, in later phases, a component can contain up to  $O(n)$  nodes, which might be spread across different machines; we use the term *component part* to refer to one piece of a component held by a single machine. At the end of the algorithm, every node  $v \in G$  will have a component label  $\ell(v)$  such that two nodes have the same label if and only if they belong to the same connected component of  $G$ .

Our algorithm heavily relies on *linear graph sketches* as a communication-efficient method to

merge multiple components. Roughly speaking, a (random) linear sketch  $\mathbf{s}_u$  of a node  $u$ 's graph neighborhood returns a sample chosen uniformly at random from  $u$ 's incident edges. Interestingly, such a linear sketch can be represented as matrices using only  $O(\text{polylog}(n))$  bits (cf. [12, 26]). A crucial property of these sketches is that they are linear: that is, given sketches  $\mathbf{s}_u$  and  $\mathbf{s}_v$ , the *combined sketch*  $\mathbf{s}_u + \mathbf{s}_v$  (“+” refers to matrix addition) has the property that, w.h.p., it yields a random sample of the edges incident to  $(u, v)$  in a graph where we have contracted the edge  $(u, v)$  to a single node; we describe the technical details in Section 2.3.

We now describe how to communicate these graph sketches in an efficient manner: Consider a component  $C$  that is split into  $j$  parts  $P_1, P_2, \dots, P_j$ , the nodes of which are hosted at machines  $M_1, M_2, \dots, M_j$ . To find an outgoing edge for  $C$ , we first instruct each machine  $M_i$  to construct a linear sketch of the graph neighborhood of each of the nodes in the part  $P_i$ . Then, we sum up these  $|P_i|$  sketches, yielding a sketch  $\mathbf{s}_{P_i}$  for the neighborhood of part  $P_i$ . To combine the sketches of the  $j$  distinct parts, we now select a *random component proxy* machine  $M_{C,r}$  for the current component  $C$  at round  $r$  (see Section 2.2). Next, machine  $M_i$  sends  $\mathbf{s}_{P_i}$  to machine  $M_{C,r}$ ; note that this causes at most  $k$  messages to be sent to the component proxy. Finally, machine  $M_{C,r}$  computes  $\mathbf{s}_C = \sum_{i=1}^j \mathbf{s}_{P_i}$ , and then uses  $\mathbf{s}_C$  to sample an edge incident to some node in  $C$ , which, by construction, is guaranteed to have its endpoint in a distinct component  $C'$ . (See Section 2.4.)

At this point, each component proxy has sampled an inter-component edge inducing the edges of a *component graph*  $\mathcal{C}$  where each vertex corresponds to a component. To enable the efficient merging of components, we employ the *distributed random ranking* (DRR) technique of [5] to break up any long paths of  $\mathcal{C}$  into more manageable directed trees of depth  $O(\log n)$ : To this end, every component chooses a rank independently and uniformly at random from  $[0, 1]$ ,<sup>4</sup> and each component (virtually) connects to its neighboring component (according to  $\mathcal{C}$ ) via a (conceptual) directed edge if and only if the latter has a higher rank. Thus, this process results in a collection of disjoint rooted trees, rooted at the node of highest (local) rank. We show in Section 2.5 that each tree has depth  $O(\log n)$ .

The merging of the components of each tree  $\mathcal{T}$  proceeds from the leafs upward (in parallel for each tree). In the first merging phase, each leaf  $C_j$  of  $\mathcal{T}$  merges with its parent  $C'$  by relabeling the component labels of all of their nodes with the label of  $C'$ . Note that the proxy  $M_{C_j}$  knows the labeling of  $C'$ , as it has computed the outgoing edge from a vertex in  $C_j$  to a vertex in  $C'$ . Therefore, machine  $M_{C_j}$  sends the label of  $C_j$  to all the machines that hold a part of  $C_j$ . In Section 2.5 we show that this can be done in parallel (for all leafs of all trees) in  $\tilde{O}(n/k^2)$  rounds. Repeating this merging procedure  $O(\log n)$  times, guarantees that each tree has been merged to a single component.

Finally, in Section 2.6 we prove that  $O(\log n)$  iterations of the above process suffice to ensure that the components at the end of the last phase correspond to the connected components of the input graph  $G$ .

We emphasize that our application of graph sketches is not trivial. For instance, linear sketches can be easily applied in the distributed streaming model by sending to a coordinator machine the sketches of the partial stream, which then will be added to obtain the sketch of the entire stream. Mimicking this trivial strategy in our model would incur a cost of  $\tilde{O}(n/k)$ .

---

<sup>4</sup>It is easy to see that an accuracy of  $\Theta(\log n)$  bits suffice to break ties w.h.p.



## 2.2 Communication via Random Proxy Machines

Recall that our algorithm iteratively places vertices into “components” (which are connected subgraphs of the actual components of  $G$ ) and subsequently merges these components according to the topology of  $G$ . Moreover, each of these components may be split into multiple parts spanning multiple machines. To ensure efficient load balancing of the messages that machines need to send on behalf of these component parts, we perform all communication via *proxy machines*. This means that, in each phase of the algorithm, starting at some round  $r$ , and for each component  $C$ , we select the machine with ID  $h(C, r) \in [k]$  as the proxy machine for component  $C$ . Note that this does not require any communication as  $h$  is common knowledge. The following lemma is a simple application of Lemma 1.

**Lemma 2.** *Suppose that each machine  $M$  generates a message of size  $O(\text{polylog}(n))$  bits for each component part residing on  $M$ ; let  $m_i$  denote the message for part  $P_i$  and let  $C$  be the component of which  $P_i$  forms a part. If each  $m_i$  is addressed to the proxy machine  $M_C$  of component  $C$ , then all messages are delivered within  $\tilde{O}(n/k^2)$  rounds w.h.p.*

*Proof.* Recall that our algorithm chooses the proxy machines independently and uniformly at random via the (shared) hash function  $h$ . Moreover, each machine has at most  $\tilde{O}(n/k)$  component parts and thus we can instantiate Lemma 1 with  $x = \tilde{O}(n/k)$ , yielding a total number of rounds of  $\tilde{O}(n/k^2)$ , as required.  $\square$

## 2.3 Linear Graph Sketches

As we will see in Section 2.5, our algorithm proceeds by merging components across randomly chosen inter-component edges. In this subsection we show how to provide these sampling capabilities in a communication-efficient way in the Big Data model by implementing random linear graph sketches. Our description follows the notation of [26].

Recall that each vertex  $u$  of  $G$  is associated with a unique integer ID from  $[n]$  (known to its home machine) which, for simplicity, we also denote by  $u$ .<sup>5</sup> Following [1], for each vertex  $u$  we define the *incidence vector*  $\mathbf{a}_u \in \{-1, 0, 1\}^{\binom{n}{2}}$  of  $u$ , which describes the incident edges of  $u$ , as follows:  $a_u[(x, y)] = 0$  if  $(x, y) \notin E(G)$  or, if  $(x, y) \in E(G)$ , then  $a_u[(x, y)] = 1$  if  $u = x < y$ , or  $a_u[(x, y)] = -1$  if  $x < u = y$ . Note that the vector  $\mathbf{a}_u + \mathbf{a}_v$  corresponds to the incidence vector of the contracted edge  $(u, v)$ . Intuitively speaking, summing up incidence vectors “zeroes out” edges between the corresponding vertices, hence the vector  $\sum_{u \in C} \mathbf{a}_u$  represents the outgoing edges of a component  $C$ .

Since each incidence vector  $\mathbf{a}_u$  requires polynomial space, it would be inefficient to directly communicate vectors to component proxies. Instead, we construct a random linear sketch  $\mathbf{s}_u$  of  $\text{polylog}(n)$ -size that has the property of allowing us to sample uniformly at random a nonzero entry of  $\mathbf{a}_u$  (i.e. an edge incident to  $u$ ). (This is referred to as  $\ell_0$ -sampling in the streaming literature, see e.g. [26].) It is shown in [12] that  $\ell_0$ -sampling can be performed by linear projections. Therefore, at the beginning of each phase  $j$  of our algorithm, we instruct each machine to exploit shared randomness in order to create a new (common)  $\text{polylog}(n) \times \binom{n}{2}$  sketch matrix  $L_j$ , which we call *phase  $j$  sketch matrix*. Then, each machine  $M$  creates a sketch  $\mathbf{s}_u = L_j \cdot \mathbf{a}_u$  for each vertex  $u$  that resides on  $M$ . Hence, each  $\mathbf{s}_u$  can be represented by a polylogarithmic number of bits.

<sup>5</sup>Note that the asymptotics of our results do not change if the size of the ID space is  $O(\text{poly}(n))$ .

Observe that, by linearity, we have  $L_j \cdot \mathbf{a}_u + L_j \cdot \mathbf{a}_v = L_j \cdot (\mathbf{a}_u + \mathbf{a}_v)$ . In other words, a crucial property of sketches is that the sum  $\mathbf{s}_u + \mathbf{s}_v$  is itself a sketch that allows us to sample an edge incident to the contracted edge  $(u, v)$ . We summarize these properties in the following statement.

**Lemma 3.** *Consider a phase  $j$ , and let  $P$  a subgraph of  $G$  induced by vertices  $\{u_1, \dots, u_\ell\}$ . Let  $\mathbf{s}_{u_1}, \dots, \mathbf{s}_{u_\ell}$  be the associated sketches of vertices in  $P$  constructed by applying the phase  $j$  sketch matrix to the respective incidence vectors. Then, the combined sketch  $\mathbf{s}_P = \sum_{i=1}^\ell \mathbf{a}_{u_i}$  can be represented using  $O(\text{polylog}(n))$  bits and, by querying  $\mathbf{s}_P$ , it is possible (w.h.p.) to sample a random edge incident to  $P$  (in  $G$ ) that has its other endpoint in  $G \setminus P$ .*

## 2.4 Outgoing Edge Selection

Now that we know how to construct a sketch of the graph neighborhood of any set of vertices, we will describe how to combine these sketches in a communication-efficient way in the Big Data model. The goal of this step is, for each (current) component  $C$ , to find an outgoing edge that connects  $C$  to some other component  $C'$ .

Recall that  $C$  itself might be split into parts  $P_1, P_2, \dots, P_j$  across multiple machines. Therefore, as a first step, each machine  $M_i$  locally constructs the combined sketch for each part that resides in  $M_i$ . By Lemma 3, the resulting sketches have polylogarithmic size each and present a sketch of the incidences of their respective component parts. Next, we combine the sketches of the individual parts of each component  $C$  to a sketch of  $C$ , by instructing the machines to send the sketch of each part  $P_i$  (of component  $C$ ) to the proxy machine of  $C$ . By virtue of Lemma 2, all of these messages are delivered to the component proxies within  $\tilde{O}(n/k^2)$  rounds. Finally, the component proxy machine of  $C$  combines the received sketches to yield a sketch of  $C$ , and randomly samples an outgoing edge of  $C$  (cf. Lemma 3). Thus, at the end of this procedure, every component (randomly) selected exactly one neighboring component. We now show that the complexity of this procedure is  $\tilde{O}(n/k^2)$  w.h.p.

**Lemma 4.** *Every component can select exactly one outgoing edge in time  $\tilde{O}(n/k^2)$  w.h.p.*

*Proof.* Clearly, since at every moment each node has a unique component's label, each machine holds  $\tilde{O}(n/k)$  component's parts w.h.p. Each of these parts selected at most one edge, and thus each machine "selected"  $\tilde{O}(n/k)$  edges w.h.p. All these edges have to be sent to the corresponding proxy. By Lemma 2, this requires  $\tilde{O}(n/k^2)$  rounds.

The procedure is completed when the proxies communicate the decision to each of the at most  $k$  components' parts. This entails as many messages as in the first part to be routed using exactly the same machines' links used in the first part, with the only difference being that messages now travel in the opposite direction. The lemma follows.  $\square$

## 2.5 Merging of Components

After the proxy machine of each component  $C$  has selected one edge connecting  $C$  to a different component, all the neighboring components need to be merged so as to become a new, bigger component. The merging is performed by relabeling the nodes of the graph such that all the nodes in the same (new) component have the same label. Notice that the merging is thus only virtual, that is, component parts that compose a new component are not moved to a common machine; rather, nodes (and their incident edges) remain in their home machine, and just get (possibly) assigned a new label.

We can think of the components and the sampled outgoing edges as a *component graph*  $\mathcal{C}$ . We use the *distributed random ranking* (DRR) technique [5] to avoid having long chains of components (i.e., long paths in  $\mathcal{C}$ ). That is, we will (conceptually) construct a forest of directed trees that is a subgraph (modulo edge directions) of the component graph  $\mathcal{C}$  and where each tree has depth at most  $O(\log n)$ . The component proxy of each component  $C$  chooses a rank independently and uniformly at random from  $[0, 1]$ . (It is easy to show that  $\Theta(\log n)$  bits provide sufficient accuracy to break ties w.h.p.) Now, the proxy machine of  $C$  (virtually) connects  $C$  to its neighboring component  $C'$  if and only if the rank chosen by the latter's proxy is higher. In this case, we say that  $C'$  becomes the *parent* of  $C$  and  $C$  is a *child* of  $C'$ .

**Lemma 5.** *After  $\tilde{O}(n/k^2)$  rounds, the structure of the DRR-tree is completed with high probability.*

*Proof.* We need to show that every proxy machine of a non-root component knows its smaller-ranking parent component and every root proxy machine knows that it is root. Note that during this step the proxy machines of the child components communicate with the respective parent proxy machines. Moreover, the number of messages sent for determining the ordering of the DRR-trees is guaranteed to be  $O(n)$  with high probability, since  $\mathcal{C}$  has only  $O(n)$  edges. Since the proxy machines are chosen independently and uniformly at random, each of these messages originates from a random source, and each machine is a proxy for  $\alpha = \tilde{O}(n/k)$  components w.h.p. Therefore, each machine will be the destination of  $\alpha$  messages, and thus, by Lemma 1, the delivery of these messages can be completed in  $\tilde{O}(n/k^2)$  rounds w.h.p.

Since links are bidirectional, the parent proxies are able to send their replies within the same number of rounds (by rerunning the message schedule of the child-to-parent communication in reverse order).  $\square$

If a component has the highest rank among all its neighbors (in  $\mathcal{C}$ ), we call it a *root component*. Since every component except root component connects to a component with higher rank, the resulting structure is a collection of disjoint rooted trees.

In the next step, we will merge all components of each tree into a single new component such that all vertices that are part of some component in this tree receive the label of the root. Consider a tree  $\mathcal{T}$ . We proceed level-wise (in parallel for all trees) and start the merging of components at the leafs that are connected to a (lower-ranking) parent component  $C$ .

**Lemma 6.** *There is a distributed algorithm that merges all trees of the DRR forest in  $\tilde{O}(dn/k^2)$  rounds with high probability, where  $d$  is the largest depth of any tree.*

*Proof.* We proceed in  $d$  iterations by merging the (current) leaf components with their parents in the tree. Thus it is sufficient to analyze the time complexity of a single iteration. To this end, we describe a procedure that changes the component labels of all vertices that are in leaf components in the DRR forest to the label of the respective parent in  $\tilde{O}(n/k^2)$  rounds.

At the beginning of each iteration, we select a new proxy for each component  $C$  by querying the shared hash function  $h(C, r)$  where  $r$  is the current round number. This ensures that there is no dependencies between the proxies used in each iteration. We already know from Lemma 5 that there is a message schedule such that leaf proxies can communicate with their respective parent proxy in  $\tilde{O}(n/k^2)$  rounds (w.h.p.) and vice versa, and thus every leaf proxy knows the component label of its parent. We have already shown in Lemma 4 that we can deliver a message from each component part to its respective proxy (when combining the sketches) in  $\tilde{O}(n/k^2)$ . Hence, by rerunning this

message schedule, we can broadcast the parent label from the leaf proxy to each component part in the same time. Each machine that receives the parent label locally changes the component label of the vertices that are in the corresponding part.  $\square$

We now prove that the depth of each DRR tree is  $O(\log n)$  with high probability. The result is a corollary of [5, Theorem 2]. To keep the paper self-contained we also provide a direct and simpler proof for this result (see Appendix).

**Lemma 7.** *The depth of each DRR tree is  $O(\log n)$  with high probability.*

*Proof.* The result follows from [5, Theorem 2], which shows that the number of nodes in every tree produced by a DRR procedure in which each component chooses up to  $\log n - 1$  random components (rather than just one) is  $O(\log n)$  w.h.p. As choosing more than one random component may result in trees with more nodes, and since the number of nodes of a tree is clearly an upper bound on the depth of the tree, the lemma follows.  $\square$

## 2.6 Analysis of the Time Complexity

We now show that the number of phases required by the algorithm to determine the connected components of the input graph is  $O(\log n)$ . At the beginning of each phase  $i$ , distributed across the  $k$  machines there are  $c_i$  distinct components. At the beginning of the algorithm each node is identified as a component, and thus  $c_0 = n$ . The algorithm ends at the completion of phase  $\varphi$ , where  $\varphi$  is the smallest integer such that  $c_\varphi = cc(G)$ , where  $cc(G)$  denotes the number of connected components of the input graph  $G$ . If pairs of components would be merged at every phase, it would be easy to argue that the process would terminate in at most  $\log n$  phases. However, in our algorithm each component connects to its neighboring component if and only if the latter has a higher rank. Nevertheless, it is not difficult to show that this slightly different process also terminates in  $O(\log n)$  phases w.h.p. (that is, components gets merged “often enough”). The intuition for this result is that, since components’ ranks are taken randomly, for each component the probability that its neighboring component has a higher rank is exactly one half. Hence, on average half of the components will not be merged with their own neighbor: each of these components thus becomes a root of one component, which means that, on average, the number of new components will be half as well.

**Lemma 8.** *After  $12 \log n$  phases, the component labels of the vertices correspond to the connected components of  $G$  with high probability.*

*Proof.* Replace the  $c_i$ ’s with corresponding random variables  $C_i$ ’s, and consider the stochastic process defined by the sequence  $C_0, C_1, \dots, C_\varphi$ . Let  $\bar{C}_i$  be the random variable that counts the number of components that actually participate at the merging process of phase  $i$ , because they do have an outgoing edge to another component. Call these components *participating components*. Clearly, by definition,  $\bar{C}_i \leq C_i$ .

We now show that, for every phase  $i \in [\varphi - 1]$ ,  $E[E[\bar{C}_{i+1} \mid \bar{C}_i]] \leq E[\bar{C}_i]/2$ . To this end, fix a generic phase  $i$  and a random ordering of its  $\bar{C}_i$  participating components. Define random variables  $X_{i,1}, X_{i,2}, \dots, X_{i,\bar{C}_i}$  where  $X_{i,j}$  takes value 1 if the  $j$ -th participating component will be a root of a participating tree/component for phase  $i + 1$ , and 0 otherwise. Then,  $\bar{C}_{i+1} \mid \bar{C}_i = \sum_{j=1}^{\bar{C}_i} X_{i,j}$  is the number of participating components for phase  $i + 1$ . As we noticed before, for any  $i \in [\varphi - 1]$

and  $j \in [\bar{C}_i]$ , the probability that a participating component will not be merged to its neighboring component, and thus become a root of a tree/component for phase  $i+1$  is exactly one half. Therefore,

$$\Pr(X_{i,j} = 1) \leq \frac{1}{2}.$$

Hence, by the linearity of expectation, we have that

$$\mathbb{E}[\bar{C}_{i+1} \mid \bar{C}_i] = \sum_{j=1}^{\bar{C}_i} \mathbb{E}[X_{i,j}] = \sum_{j=1}^{\bar{C}_i} \Pr(X_{i,j} = 1) \leq \frac{\bar{C}_i}{2}.$$

Then, using again the linearity of expectation,

$$\mathbb{E}[\mathbb{E}[\bar{C}_{i+1} \mid \bar{C}_i]] \leq \mathbb{E}\left[\frac{\bar{C}_i}{2}\right] = \frac{\mathbb{E}[\bar{C}_i]}{2}.$$

We now leverage this result to prove the claimed statement. Let us call a phase *successful* if it reduces the number of participating components by a factor of at most  $3/4$ . By Markov's inequality, the probability that phase  $i$  is not successful is

$$\begin{aligned} \Pr\left(\mathbb{E}[\bar{C}_{i+1} \mid \bar{C}_i] > \frac{3}{4}\mathbb{E}[\bar{C}_i]\right) &< \frac{\mathbb{E}[\mathbb{E}[\bar{C}_{i+1} \mid \bar{C}_i]]}{(3/4)\mathbb{E}[\bar{C}_i]} \\ &\leq \frac{\mathbb{E}[\bar{C}_i]}{2} \cdot \frac{4}{3\mathbb{E}[\bar{C}_i]} \\ &= \frac{2}{3}, \end{aligned}$$

and thus the probability that a phase of the algorithm is successful is at least  $1/3$ . Now consider a sequence of  $12 \log n$  phases of the algorithm. We shall prove that within that many phases the algorithm w.h.p. has reduced the number of participating components a sufficient number of times so that the algorithm has terminated, that is,  $\varphi \leq 12 \log n$  w.h.p. Let  $X_i$  be an indicator variable that takes value 1 if phase  $i$  is successful, and 0 otherwise (this also includes the case that the  $i$ -th phase does not take place because the algorithm already terminated). Let  $X = \sum_{i=1}^{12 \log n} X_i$  be the number of successful phases out of the at most  $12 \log n$  phases of the algorithm. Since  $\Pr(X_i = 1) \geq 1/3$ , by the linearity of expectation we have that

$$\mathbb{E}[X] = \sum_{i=1}^{12 \log n} \mathbb{E}[X_i] = \sum_{i=1}^{12 \log n} \Pr(X_i = 1) \geq \frac{12 \log n}{3} = 4 \log n.$$

As the  $X_i$ 's are independent we can apply a standard Chernoff bound (see, e.g., [27]), which gives

$$\Pr(X \leq \log n) \leq e^{-4 \log n (3/4)^2 / 2} = e^{-\frac{9}{8} \log n} < \frac{1}{n}.$$

Hence, w.h.p.  $12 \log n$  phases are enough for the algorithm to determine all the components of the input graph.  $\square$

**Theorem 1.** *There is a distributed algorithm in the Big Data model that determines the connected components of a graph  $G$  in  $\tilde{O}(n/k^2)$  rounds with high probability.*

*Proof.* Lemma 8 tells us that the algorithm finishes after  $O(\log n)$  phases w.h.p. To analyze the time complexity of an individual phase, recall that it takes  $\tilde{O}(n/k^2)$  rounds to sample an outgoing edge (cf. Lemma 4). Then, building the DRR forest requires  $\tilde{O}(n/k^2)$  additional rounds, according to Lemma 5. Merging each DRR tree  $\mathcal{T}$  in a level-wise fashion (in parallel) takes  $\tilde{O}(dn/k^2)$  rounds (cf. Lemma 6), where  $d$  is the depth of  $\mathcal{T}$  which, by virtue of Lemma 7, is bounded by  $O(\log n)$ . Since each of these time bounds hold with high probability, and we perform  $O(\log n)$  phases w.h.p., we can take a union bound to conclude that the total time complexity of the algorithm is  $\tilde{O}(n/k^2)$ .  $\square$

We conclude the section by noticing that it is easy to output the actual number of connected components after the termination of our algorithm: every machine just needs to send “YES” directly to the proxies of each of the components’ labels it holds, and subsequently such proxies will send the labels of the components for which they received “YES” to one predetermined machine. Since components’ proxies are spread across the machines uniformly at random, by Lemma 1 the first step takes  $\tilde{O}(n/k^2)$  rounds w.h.p., and the second step takes only  $O(\log n)$  rounds w.h.p.

### 3 Applications

In this section we describe how to use our fast connectivity algorithm as a building block to solve several other fundamental problems in the Big Data model in time  $\tilde{O}(n/k^2)$ .

#### 3.1 Constructing a Minimum Spanning Tree

The minimum spanning tree (MST) problem requires the machines to jointly output a set of edges that form a tree, connect all nodes, and have the minimum possible total weight. Interestingly, [16] shows that  $\tilde{\Omega}(n/k)$  rounds are necessary for constructing *any* spanning tree (ST), assuming that, for every spanning tree edge  $(u, v)$ , the home machine of  $u$  and the home machine of  $v$  must *both* eventually output  $(u, v)$  as being part of the ST. We now show that we can break the  $\tilde{\Omega}(n/k)$  barrier, under the slightly less stringent requirement that at least *one* machine outputs each spanning tree edge  $e$ , but not necessarily any of the home machines of  $e$ . Note that for the MST problem we assume that each edge  $e = (u, v)$  of the input graph  $G$  has an associated *edge weight*  $w(e)$  that is known to the home machines of  $u$  and  $v$ .

Our algorithm mimics the multi-pass MST construction procedure of [1] that was originally devised for the (centralized) streaming model. To this end, we modify our connectivity procedure of Section 2, by ensuring that when a component proxy  $C$  chooses an outgoing edge  $e$ , then  $e$  is the *minimum weight outgoing edge* (MWOE) of  $C$  with high probability.

We now describe the  $i$ -th phase of this MST construction in more detail: Analogously to our algorithm in Section 2, the proxy of each component  $C$  determines an outgoing edge  $e_0$ , which, by the guarantees of our sketch construction (cf. Lemma 3), is chosen uniformly at random from all possible outgoing edges of  $C$ .

We then repeat the following edge-elimination process  $t = \Theta(\log n)$  times: The proxy broadcasts  $w(e_0)$  to every component part of  $C$ . Recall from Lemma 4 that this communication is possible in  $\tilde{O}(n/k^2)$  rounds. Upon receiving this message, the machine  $M$  of a part  $P$  of  $C$  now constructs a new sketch  $\mathbf{s}_u$  for each  $u \in P$ , but first zeroes out all entries in  $\mathbf{a}_u$  that refer to edges of weight  $> w(e_0)$ . (See Section 2.3 for a more detailed description of  $\mathbf{a}_u$  and  $\mathbf{s}_u$ .) Again, we combine the sketches of all vertices of all parts of  $C$  at the proxy of  $C$ , which in turn samples a new outgoing edge  $e_1$  for  $C$ . Since each time we sample a randomly chosen edge and eliminate all higher weight

edges, it is easy to see that the edge  $e_t$  is the MWOE of  $C$  w.h.p. Thus, the proxy machine of  $C$  includes the edge  $e_t$  as part of the MST output. Note that this additional elimination procedure incurs only a logarithmic time complexity overhead.

At the end of each phase, we proceed by (virtually) merging the components along their MWOEs in a similar manner as for the connectivity algorithm (cf. Section 2.5), thus requiring  $\tilde{O}(n/k^2)$  rounds in total.

Let  $E$  be the set of added outgoing edges. Since the components of the connectivity algorithm eventually match the actual components of the input graph, the graph  $H$  on the vertices  $V(G)$  induced by  $E$  connects all vertices of  $G$ . Moreover, since we are merging components according to the trees of the DRR-process (cf. Section 2.5), it follows that  $H$  is cycle-free.

We can now fully classify the MST problem in the Big Data model:

**Theorem 2.** *There exists an algorithm in the Big Data model that solves MST in either*  
 (a)  $\tilde{O}(n/k^2)$  rounds, if each MST-edge is output by at least one machine, or, in  
 (b)  $\tilde{O}(n/k)$  rounds (cf. [16]), if each MST-edge  $e$  is output by both machines that hold an endpoint of  $e$ .  
 The bounds of (a) and (b) are tight up to logarithmic-factors.

### 3.2 $O(\log n)$ -Approximation for Min-Cut

**Theorem 3.** *There exists an  $O(\log n)$ -approximation algorithm for the min-cut problem in the Big Data model that runs in  $\tilde{O}(n/k^2)$  rounds w.h.p.*

*Proof (sketch).* We simply use exponentially growing sampling probabilities for sampling edges and then check connectivity, leveraging a result by Karger [13]. This procedure was proposed in [10] in the classic  $\mathcal{CONGEST}$  model, and can be implemented in the  $k$ -machine model as well where we use our fast connectivity algorithm (in place of Thurimella's algorithm); the time complexity is dominated by the connectivity-testing procedure and hence is  $\tilde{O}(n/k^2)$  w.h.p.  $\square$

### 3.3 Algorithms for Verification Problems

It is well known that graph connectivity is an important building block for several verification problems (cf. [6]). The following theorem summarizes these results in the Big Data model.

**Theorem 4.** *There exist algorithms for the Big Data model that solve the following verification problems in  $\tilde{O}(n/k^2)$  rounds with high probability: spanning connected subgraph, cycle containment,  $e$ -cycle containment, cut,  $s$ - $t$  connectivity, edge on all paths,  $s$ - $t$  cut, bipartiteness.<sup>6</sup>*

*Proof (sketch).* We discuss each problem separately.

**Cut verification:** remove the edges of the given cut from  $G$ , and then check whether the resulting graph is connected.

**$s$ - $t$  connectivity verification:** run our connectivity algorithm and then verify whether  $s$  and  $t$  are in the same connected component by checking their component labels, i.e.,  $\ell(s) = \ell(t)$ .

---

<sup>6</sup>These problems are formally defined in Section 2.4 of [6].

**Edge on all paths verification:** since  $e$  lies on all paths between  $u$  and  $v$  iff  $u$  and  $v$  are disconnected in  $G \setminus \{e\}$ , we can simply use the  $s$ - $t$  connectivity verification algorithm of previous point.

**$s$ - $t$  cut verification:** to verify if a subgraph is an  $s$ - $t$  cut, simply verify  $s$ - $t$  connectivity of the graph after removing the edges of the subgraph.

**Bipartiteness verification:** use our connectivity algorithm and the reduction presented in Section 3.3 of [1].

**Spanning connected subgraph, cycle containment and  $e$ -cycle containment verification:** these also follow from the reductions given in [6].  $\square$

## 4 Lower Bounds for Verification Problems

In this section we show that  $\tilde{\Omega}(n/k^2)$  rounds is a fundamental lower bound for many graph verification problems in the Big Data model.

Even though many verification problems are known to have a lower bound of  $\tilde{\Omega}(D + \sqrt{n})$  in the classic distributed  $\mathcal{CONGEST}$  model [6], the reduction of [6] encodes a  $\Theta(\sqrt{n})$ -instance of set disjointness, requiring at least one node to receive  $\tilde{\Theta}(\sqrt{n})$  information across a single short “highway” path or via  $\Theta(\sqrt{n})$  longer paths of length  $\Theta(\sqrt{n})$ . Moreover, recall that we assume the random vertex partition model (cf. Section 1.1), whereas the results of [6] assume worst case inputs. Lastly, any pair of machines can communicate directly in the Big Data model, allowing us to break the (trivial) bound of  $\Omega(D)$  rounds in the  $\mathcal{CONGEST}$  model.

Our complexity bounds will follow from the communication complexity of 2-player set disjointness in the *random input partition model* (cf. [16]). While in the standard model of communication complexity there are 2 players, Alice and Bob, and Alice (resp. Bob) receives an input vector  $X$  (resp.  $Y$ ) of  $b$  bits [17], in the random input partition model Alice receives  $X$  and, in addition, each bit of  $Y$  has probability  $1/2$  to be revealed to Alice. Bob’s input is defined similarly w.r.t. to  $X$ . In the *set disjointness problem*, Alice and Bob must output 1 if and only if there is no index  $i$  such that  $X[i] = Y[i] = 1$ .

**Lemma 9** ([16, Lemma 3.2]). *For some constant  $\epsilon > 0$ , every randomized communication protocol that solves set disjointness in the random input partition model of 2-party communication complexity with probability  $\geq 1 - \epsilon$ , requires  $\Omega(b)$  bits.*

Here follows the main result of this section.

**Theorem 5.** *There exists a constant  $\gamma > 0$  such that any  $\gamma$ -error algorithm  $\mathcal{A}$  has round complexity of  $\tilde{\Omega}(n/k^2)$  on an  $n$ -node vertex graph of diameter 2 in the Big Data model, if  $\mathcal{A}$  solves any of the following problems: connectivity [16], spanning connected subgraph, cycle containment,  $e$ -cycle containment,  $s$ - $t$ -connectivity, cut, edge on all paths, and  $s$ - $t$ -cut.*

*Proof.* The high-level idea of the proof is similar to the simulation theorem of [6]. Interestingly, our lower bounds hold even for graphs of diameter 2, which is in contrast to the analogous results for the classic distributed  $\mathcal{CONGEST}$  model assumed in [6]. We first present the argument for the spanning connected subgraph (SCS) problem defined below. The remaining problems can be reduced to the



SCS problem using similar reductions as in [6]; we defer the details to the extended version of the paper. We remark that the lower bound of connectivity verification was already shown in [16].

**Spanning Connected Subgraph.** In the spanning connected subgraph (SCS) problem we are given a graph  $G$  and a subgraph  $H \subseteq G$  and we want to verify whether  $H$  spans  $G$  and is connected. We will show, through a reduction from 2-party set disjointness, that any algorithm for SCS in the Big Data model requires  $\tilde{\Omega}(n/k^2)$  rounds.

Given an instance of the 2-party set disjointness problem in the random partition model we will construct the following input graphs  $G$  and  $H$ . The nodes of  $G$  consist of 2 special nodes  $s$  and  $t$ , and nodes  $u_1, \dots, u_b, v_1, \dots, v_b$ , for  $b = (n - 2)/2$ . (For clarity of presentation, we assume that  $(n - 2)/2$  and  $k/2$  are integers.) The edges of  $G$  consist of the edges  $(s, t), (u_i, v_i), (s, u_i), (v_i, t)$ , for  $1 \leq i \leq b$ . See Figure 1.

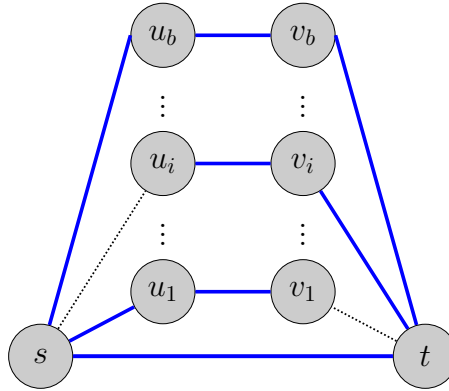


Figure 1: The graph construction for the spanning connected subgraph problem, given a set disjointness instance where  $X[1] = 0, Y[1] = 1, X[i] = 1, Y[i] = 0, X[b] = Y[b] = 0$ . The dotted edges represent the edges of  $G$ , whereas the thick blue edges are the edges of subgraph  $H$ . Note that the subgraph  $H$  contains all edges  $(u_i, v_i)$  ( $1 \leq i \leq b$ ) and  $(s, t)$ . The remaining edges of  $H$  are determined by the input vectors  $X$  and  $Y$  of the set disjointness instance. That is, edge  $(s, u_i)$  is added to  $H$  iff  $X[i] = 0$  and the same is true for adding  $(v_i, t)$  iff  $Y[i] = 0$ . Thus  $H$  is a spanning connected subgraph if and only if  $X$  and  $Y$  are disjoint.

Let  $\mathcal{M}_A$  be the machines simulated by Alice and let  $\mathcal{M}_B$  be the set of machines simulated by Bob, such that  $|\mathcal{M}_A| = |\mathcal{M}_B| = k/2$ . First, Alice and Bob use shared randomness to choose the machines  $M_X$  and  $M_Y$  that receive the vertices  $s$  and  $t$ . If  $M_X \neq M_Y$ , then Alice assigns  $t$  to a machine chosen randomly from  $\mathcal{M}_A$  and Bob assigns  $Y$  to a random machine in  $\mathcal{M}_B$ . Otherwise, if  $M_X$  and  $M_Y$  denote the same machine, Alice and Bob output 0 and terminate the simulation.

The subgraph  $H$  is determined by the disjointness input vectors  $X$  and  $Y$  as follows:  $H$  contains all nodes of  $G$  and the edges  $(u_i, v_i), (s, t)$ ,  $1 \leq i \leq b$ . Recall that, in the random partition model,  $X$  and  $Y$  are randomly distributed between Alice and Bob, but Alice knows all  $X$  and Bob knows all of  $Y$ . Hence, Alice and Bob mark the corresponding edges as being part of  $H$  according to their respective input bits. That is, if Alice received  $X[i]$  (i.e. Bob did *not* receive  $X[i]$ ), she assigns the node  $u_i$  to a random machine in  $\mathcal{M}_A$  and adds the edge  $(s, u_i)$  to  $H$  iff  $X[i] = 0$ . Similarly, the edge  $(v_i, t)$  is added to  $H$  iff  $Y[i] = 0$  (by either Alice or Bob depending on who receives  $Y[i]$ ). Note that, since  $X$  and  $Y$  were assigned according to the random input partition model, the resulting

distribution of vertices to machines adheres to the random vertex partition model (cf. Section 1.1). Clearly,  $H$  is an SCS if and only if  $X$  and  $Y$  are disjoint.

We describe the simulation from Alice’s point of view (the simulation for Bob is similar): Alice locally maintains a counter  $r_A$ , initialized to 1, that represents the current round number. Then, she simulates the run of  $\mathcal{A}$  on each of her  $k/2$  machines, yielding a set of  $\ell$  messages  $m_1, \dots, m_\ell$  of  $O(\text{polylog}(n))$  bits each that need to be sent to Bob to simulate the algorithm on his machines in the next round. By construction, we have that  $0 \leq \ell \leq \lceil k^2/4 \rceil$ . To send these messages in the (asynchronous) 2-party random partition model of communication complexity, Alice sends a message  $\langle \ell, (M_1, m_1, M_2), \dots, (M_\ell, m_\ell, M_{\ell+1}) \rangle$  to Bob, where a tuple  $(M_i, m_i, M_{i+1})$  corresponds to a message  $m_i$  generated by machine  $M_i$  simulated by Alice and destined to machine  $M_{i+1}$  simulated at Bob. Upon receiving this message, Bob increases its own round counter and then locally simulates the next round of his machines by delivering the messages to the appropriate machines. Adding the source and destination fields to each message incurs only a  $O(\log k) = O(\log n)$  overhead, hence the total communication generated by simulating a single round of  $\mathcal{A}$  is upper bounded by  $\tilde{O}(k^2)$ . Therefore, if  $\mathcal{A}$  takes  $T$  rounds to solve SCS in the Big Data model, then this gives us an  $O(Tk^2 \text{polylog}(n))$ -bit communication complexity protocol for set disjointness in the random partition model, as the communication between Alice and Bob is determined by the communication across the  $\Theta(k^2)$  links required for the simulation, each of which can carry  $O(\text{polylog}(n))$  bits per round. Note that, if  $\mathcal{A}$  errs with probability at most  $\gamma$ , then the simulation errs with probability at most  $\gamma + 1/k$  where the extra  $1/k$  term comes from the possibility that machines  $M_X$  and  $M_Y$  refer to the same machine. For large enough  $k$  and small enough  $\gamma$  we have  $\gamma + 1/k < \epsilon$ . It follows that we need to simulate at least  $T = \tilde{\Omega}(n/k^2)$  many rounds, since we know that the set disjointness problem requires  $\Omega(b)$  bits in the random partition model, when the error is smaller than  $\epsilon$ .  $\square$

## 5 Conclusions

Several open problems are raised by our work. Our connectivity algorithm is randomized; it will be interesting to study the deterministic complexity of graph connectivity in the Big Data model. In particular, can we give a  $\tilde{O}(n/k^2)$  deterministic algorithm for connectivity? Or, is the deterministic lower bound for connectivity  $\tilde{\Omega}(n/k)$ ? Can we get rid of shared randomness in our connectivity algorithm? Are there fast (i.e.,  $\tilde{O}(n/k^2)$  rounds) algorithms for higher-order connectivity? In particular, even for 2-edge/vertex connectivity?

**Acknowledgments.** The authors would like to thank Seth Gilbert, Andrew McGregor, and Danupon Nanongkai for helpful discussions.

## References

- [1] Kook Jin Ahn, Sudipto Guha, and Andrew McGregor. Analyzing graph structure via linear measurements. In *Proceedings of the 23rd Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 459–467, 2012.
- [2] Kook Jin Ahn, Sudipto Guha, and Andrew McGregor. Graph sketches: sparsification, spanners, and subgraphs. In *Proceedings of the 31st ACM Symposium on Principles of Database Systems (PODS)*, pages 5–14, 2012.

- [3] Otakar Boruvka. O Jistém Problému Minimálním (About a Certain Minimal Problem). *Práce Mor. Přírodoved. Spol. v Brně III*, 3, 1926.
- [4] Keren Censor-Hillel and Ami Paz. Computing exact distances in the congested clique. *CoRR*, abs/1412.2667, 2014.
- [5] Jen-Yeu Chen and Gopal Pandurangan. Almost-optimal gossip-based aggregate computation. *SIAM J. Comput.*, 41(3):455–483, 2012.
- [6] Atish Das Sarma, Stephan Holzer, Liah Kor, Amos Korman, Danupon Nanongkai, Gopal Pandurangan, David Peleg, and Roger Wattenhofer. Distributed verification and hardness of distributed approximation. *SIAM J. Comput.*, 41(5):1235–1265, 2012.
- [7] Andrew Drucker, Fabian Kuhn, and Rotem Oshman. On the power of the congested clique model. In *Proceedings of the 32nd ACM Symposium on Principles of Distributed Computing (PODC)*, pages 367–376, 2014.
- [8] Michael Elkin, Hartmut Klauck, Danupon Nanongkai, and Gopal Pandurangan. Can quantum communication speed up distributed computation? In *Proceedings of the 32nd ACM Symposium on Principles of Distributed Computing (PODC)*, pages 166–175, 2014.
- [9] Robert G. Gallager, Pierre A. Humblet, and Philip M. Spira. A distributed algorithm for minimum-weight spanning trees. *ACM Trans. Program. Lang. Syst.*, 5(1):66–77, 1983.
- [10] Mohsen Ghaffari and Fabian Kuhn. Distributed minimum cut approximation. In *Proceedings of the 27th International Symposium on Distributed Computing (DISC)*, pages 1–15, 2013.
- [11] James W. Hegeman, Gopal Pandurangan, Sriram V. Pemmaraju, Vivek B. Sardeshmukh, and Michele Scquizzato. Toward optimal bounds in the congested clique: Graph connectivity and MST. 2015. Manuscript.
- [12] Hossein Jowhari, Mert Saglam, and Gábor Tardos. Tight bounds for  $L_p$  samplers, finding duplicates in streams, and related problems. In *Proceedings of the 30th ACM Symposium on Principles of Database Systems (PODS)*, pages 49–58, 2011.
- [13] David R. Karger. Random sampling in cut, flow, and network design problems. In *Proceedings of the 26th Annual ACM Symposium on Theory of Computing (STOC)*, pages 648–657, 1994.
- [14] Howard J. Karloff, Siddharth Suri, and Sergei Vassilvitskii. A model of computation for MapReduce. In *Proceedings of the 21st annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 938–948, 2010.
- [15] Petteri Kaski, Janne H. Korhonen, Christoph Lenzen, and Jukka Suomela. Algebrisation in distributed graph algorithms: Fast matrix multiplication in the congested clique. *CoRR*, abs/1412.2109, 2014.
- [16] Hartmut Klauck, Danupon Nanongkai, Gopal Pandurangan, and Peter Robinson. Distributed computation of large-scale graph problems. In *Proceedings of the 26th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 391–410, 2015.

- [17] Eyal Kushilevitz and Noam Nisan. *Communication Complexity*. Cambridge University Press, 1997.
- [18] Shay Kutten, Gopal Pandurangan, David Peleg, Peter Robinson, and Amitabh Trehan. Sublinear bounds for randomized leader election. *Theoret. Comput. Sci.*, 561:134–143, 2015.
- [19] Silvio Lattanzi, Benjamin Moseley, Siddharth Suri, and Sergei Vassilvitskii. Filtering: a method for solving graph problems in MapReduce. In *Proceedings of the 23rd ACM Symposium on Parallelism in Algorithms and Architectures (SPAA)*, pages 85–94, 2011.
- [20] Christoph Lenzen. Optimal deterministic routing and sorting on the congested clique. In *Proceedings of the 31st ACM Symposium on Principles of Distributed Computing (PODC)*, pages 42–50, 2013.
- [21] Christoph Lenzen and Roger Wattenhofer. Tight bounds for parallel randomized load balancing. In *STOC*, pages 11–20, 2011.
- [22] Jure Leskovec, Anand Rajaraman, and Jeffrey David Ullman. *Mining of Massive Datasets*. Cambridge University Press, 2014.
- [23] Zvi Lotker, Boaz Patt-Shamir, Elan Pavlov, and David Peleg. Minimum-weight spanning tree construction in  $O(\log \log n)$  communication rounds. *SIAM J. Comput.*, 35(1):120–131, 2005.
- [24] Nancy A. Lynch. *Distributed Algorithms*. Morgan Kaufmann Publishers Inc., 1996.
- [25] Grzegorz Malewicz, Matthew H. Austern, Aart J. C. Bik, James C. Dehnert, Ilan Horn, Naty Leiser, and Grzegorz Czajkowski. Pregel: a system for large-scale graph processing. In *Proceedings of the 2010 ACM International Conference on Management of Data (SIGMOD)*, pages 135–146, 2010.
- [26] Andrew McGregor. Graph stream algorithms: a survey. *SIGMOD Record*, 43(1):9–20, 2014.
- [27] Michael Mitzenmacher and Eli Upfal. *Probability and Computing: Randomized Algorithms and Probabilistic Analysis*. Cambridge University Press, 2005.
- [28] Danupon Nanongkai. Distributed approximation algorithms for weighted shortest paths. In *Proceedings of the 46th ACM Symposium on Theory of Computing (STOC)*, pages 565–573, 2014.
- [29] Danupon Nanongkai, Atish Das Sarma, and Gopal Pandurangan. A tight unconditional lower bound on distributed randomwalk computation. In *Proceedings of the 30th Annual ACM Symposium on Principles of Distributed Computing (PODC)*, pages 257–266, 2011.
- [30] David Peleg. *Distributed Computing: A Locality-sensitive Approach*. Society for Industrial Mathematics, 2000.
- [31] Sriram V. Pemmaraju and Vivek B. Sardeshmukh. Minimum-weight spanning tree construction in  $O(\log \log \log n)$  rounds on the congested clique. *CoRR*, abs/1412.2333, 2014.
- [32] The Apache Project. Apache Giraph, <http://giraph.apache.org/>.

- [33] Yogesh Simmhan, Alok Gautam Kumbhare, Charith Wickramaarachchi, Soonil Nagarkar, Santosh Ravi, Cauligi S. Raghavendra, and Viktor K. Prasanna. Goffish: A sub-graph centric framework for large-scale graph analytics. In *Proceedings of the 20th International Conference on Parallel Processing (Euro-Par)*, pages 451–462, 2014.
- [34] Isabelle Stanton. Streaming balanced graph partitioning algorithms for random graphs. In *Proceedings of the 25th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 1287–1301, 2014.
- [35] Isabelle Stanton and Gabriel Kliot. Streaming graph partitioning for large distributed graphs. In *Proceedings of the 18th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD)*, pages 1222–1230, 2012.
- [36] Ramakrishna Thurimella. Sub-linear distributed algorithms for sparse certificates and biconnected components. *J. Algorithms*, 23(1):160–179, 1997.
- [37] Yuanyuan Tian, Andrey Balmin, Severin Andreas Corsten, Shirish Tatikonda, and John McPherson. From “think like a vertex” to “think like a graph”. *PVLDB*, 7(3):193–204, 2013.
- [38] David P. Woodruff and Qin Zhang. When distributed computation is communication expensive. In *Proceedings of the 27th International Symposium on Distributed Computing (DISC)*, pages 16–30, 2013.
- [39] Da Yan, James Cheng, Yi Lu, and Wilfred Ng. Blogel: A block-centric framework for distributed computation on real-world graphs. *PVLDB*, 7(14):1981–1992, 2014.

## A Omitted Proofs

### A.1 Proof of Lemma 7

*Proof.* Consider one phase of the algorithm, and suppose that during that phase there are  $n$  components. (In one phase there are  $c \leq n$  components, thus setting  $c = n$  gives a valid upper bound to the height of each DRR tree in that phase.) Each component picks a random rank from  $[0, 1]$ . Thus, all ranks are distinct. If the target component's rank is higher, then the source component connects to it, otherwise the source component becomes a root of a DRR tree.

Consider an arbitrary component of the graph, and consider the (unique) path  $P$  starting from the node that represents the component to the root of the tree that contains it. Let  $|P|$  be the number of nodes of  $P$ , and assign indexes to the  $|P|$  nodes of  $P$  according to their position in the path from the selected node to the root. (See Figure 2.)

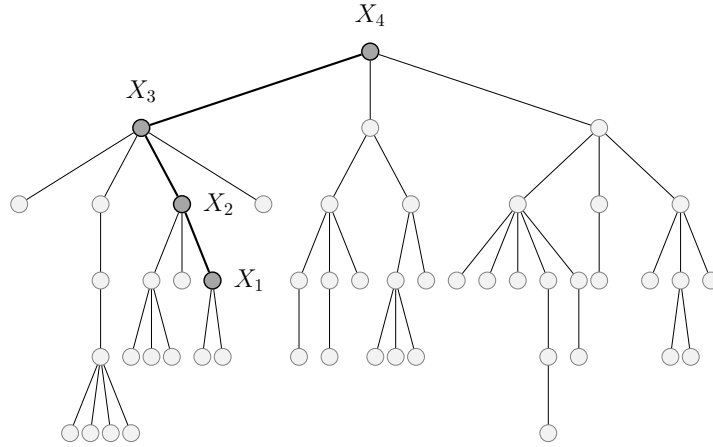


Figure 2: One DRR tree, and one path from one node to the root of the tree. Nodes of the path are labeled with the indicator variable associated to them, indexed by the position of the node in the path.

For each  $i \in [|P|]$ , define  $X_i$  as the indicator variable that takes value 1 if node  $i$  is not the root of  $P$ , and 0 otherwise. Then,  $X = \sum_{i=1}^{|P|} X_i$  is the length of the path  $P$ . Because of the random choice for the outgoing edge made by components' parts, the outgoing edge of each component is to a random (and distinct) component. This means that, for each  $j \leq |P|$ , the ranks of the first  $j$  nodes of the path form a set of  $j$  random values in  $[0, 1]$ . Hence, the probability that a new random value in  $[0, 1]$  is higher than the rank of the  $j$ -th node of the path is the probability that the new random value is higher than all the  $j$  previously chosen random values (that is, the probability its value is the highest among all the first  $j$  values of the path), and this probability is at most  $1/(j+1)$ . Thus,  $\Pr(X_i = 1) \leq 1/(i+1)$ . Hence, by the linearity of expectation, the expected height

of a path in a tree produced by the DRR procedure is

$$\begin{aligned}
\mathbb{E}[X] &= \sum_{i=1}^{|P|} \mathbb{E}[X_i] \\
&\leq \sum_{i=1}^n \mathbb{E}[X_i] \\
&= \sum_{i=1}^n \Pr(X_i = 1) \\
&\leq \sum_{i=1}^n \frac{1}{i+1} \\
&\leq \log(n+1).
\end{aligned}$$

Notice that the  $X_i$ 's are independent (but not identically distributed) random variables, since the probability that the  $i$ -th smallest ranked node is not a root depends only on the random neighbor that it picks, and is independent of the choices of the other nodes. Thus, applying a standard Chernoff bound (see, e.g., [27]) we have

$$\Pr(X \geq 6 \log(n+1)) \leq 2^{-6 \log(n+1)} = \frac{1}{(n+1)^6}.$$

Applying the union bound over all the at most  $n$  paths concludes the proof.  $\square$